


Mahr



MarCoat™

# Streams	1
Max Temperature	120 °C / 250 °F
Max Pressure	400 psi
Max Viscosity	5 000 cP
Capacity (per stream)	0.08 - 12 ml/rev
Speed	15 - 125 rpm
Flow Rate (per stream)	0.8 - 1500 ml/min

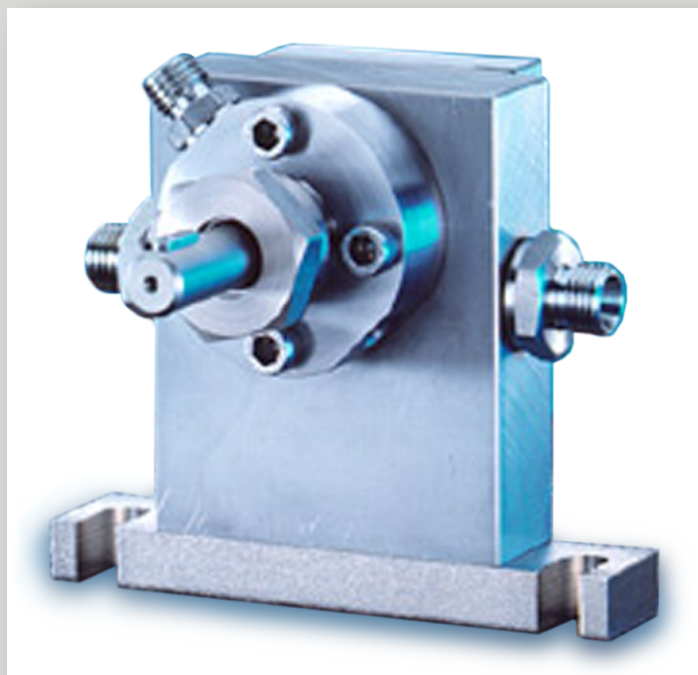

DosiMar™

# Streams	1
Max Temperature	180 °C / 350 °F
Max Pressure	1400 psi
Max Viscosity	60 000 cP
Capacity (per stream)	0.02 - 100 ml/rev
Speed	10 - 80 rpm
Flow Rate (per stream)	0.2 - 8000 ml/min

Mahr Metering Systems Corporation

1415 - A Cross Beam Drive, Charlotte , NC 28217, 704.525.7128

www.mahrusa.com